



Model no. **AS-009**

## Twin-Head Stitcher

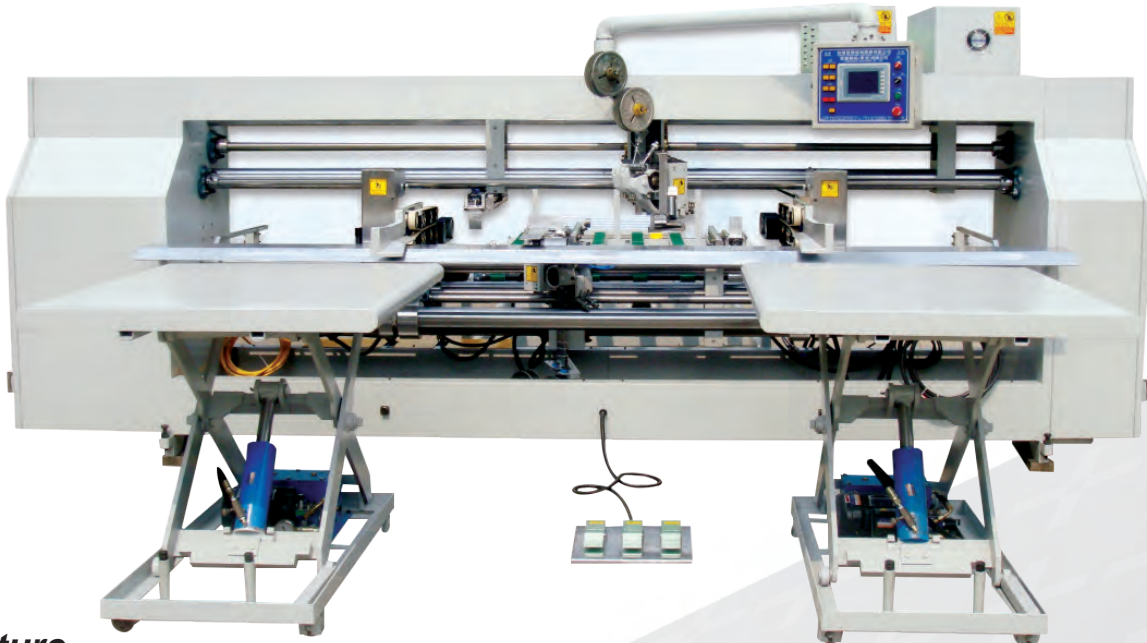

### Feature

- Three-minute quick order change.
- Easy operation, no training is necessary.
- It can run three modes of stitching.
- Single stitching: "/ / / / / / / /"
- Tie stitching: "// / / / / / / / /"
- Double stitching: " / / / / / / / / / /"
- Stitching head controlled by servo motor.
- Automatic batch ejector.
- LCD display monitoring for trouble shooting.
- Automatically calculates pitch of stitching and quantity of stitching.
- Board thickness allowed: Single/double wall(3-8mm).
- Wire length: 36mm, not adjustable.
- Wire spool capacity: 2 kgs.
- Wire type: Flat, fixed to one spec. according to customer requirement.

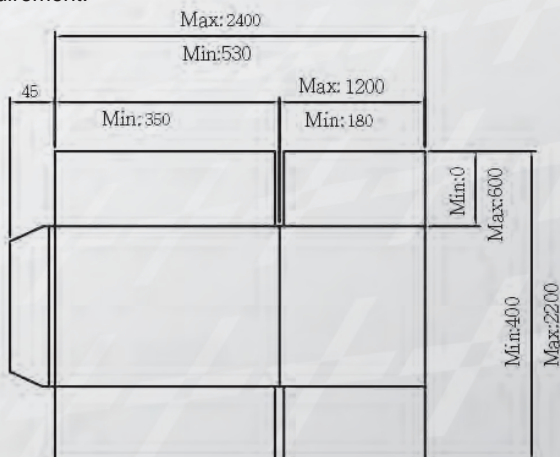

	AS-009A	AS-009B	AS-009C
Max.(L+W) X2	4800 mm	5400 mm	6000 mm
Min.(L+W) X2		1060 mm	
Max.(S+H+S)		2200 mm	
Min.(S+H+S)		400 mm	
Max. L	2220 mm	2520 mm	2820 mm
Min. L		350 mm	
Max. W	1200 mm	1350 mm	1500 mm
Min. W		180 mm	
Height of Feeder		900 mm	
Stitching speed	400 Stitching/Min		
No. Of stitching	1~99		
TS	45 mm		
Stitching Pitch	30-100 mm		

